

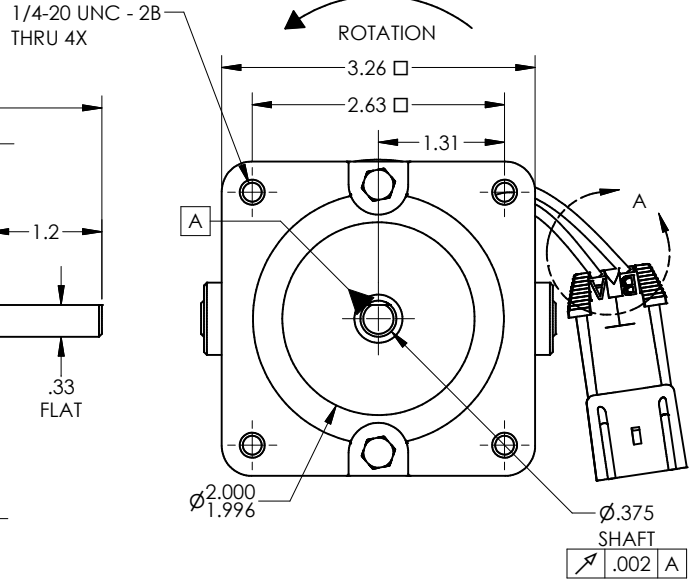
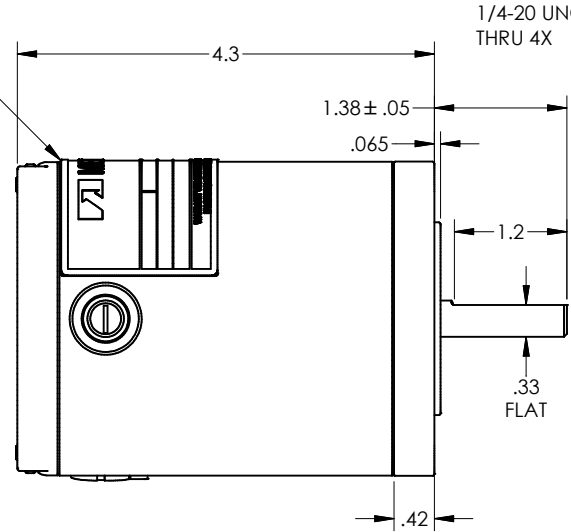
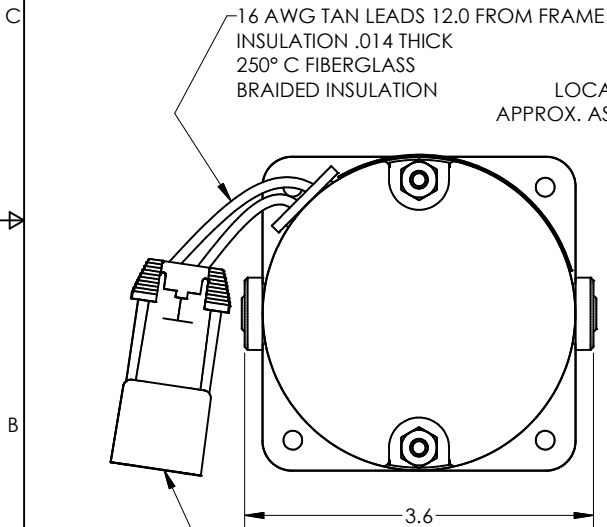
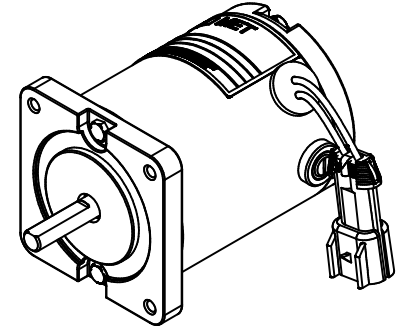


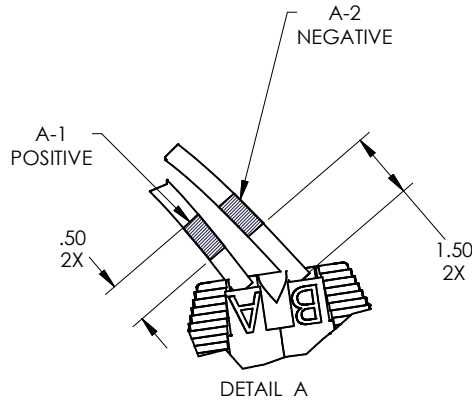

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE PROPERTY OF MINNESOTA ELECTRIC TECHNOLOGY INC. AND MUST NOT BE REPRODUCED, COPIED, OR DISCLOSED TO OTHERS EXCEPT AS SPECIFICALLY AUTHORIZED BY MINNESOTA ELECTRIC TECHNOLOGY INC.

REVISION HISTORY					
REVI	ECO	DATE	DESCRIPTION	DWR	CHKR
D	36329	7/22/1997	REDRAWN: ADD CONNECTOR ASS'Y DETAIL	PAB	-
D	-	8/27/2008	REDRAWN TO NEW ASME AND MET STANDARDS: NO CHANGE	DJG	KL
E	40398	5/2/2012	FRAME FINISH CHANGE	DJG	DL

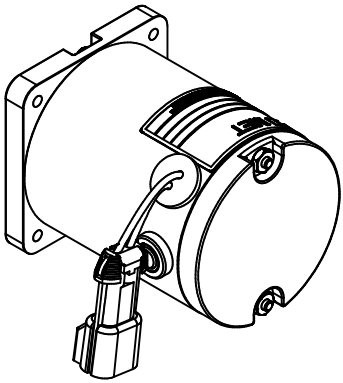

- CONNECTOR DETAIL**
 PACKARD ELECTRIC CONNECTOR (P/N: 1530 0002) QTY 1
 PACKARD ELECTRIC SECONDARY LOCK (P/N 1530 0014 TYPE 102) QTY1
 PACKARD ELECTRIC PIN (P/N 1204 8159 TYPE 102) QTY 2
 PACKARD ELECTRIC SEAL (PN 1201 0293 TYPE 102) QTY 2
 STRIP LEADS .22 ± .02 FROM ENDS

- NOTES:**
 1. BEARING GREASE EXXON POLYREX
 2. BEARING TYPE: BALL
 3. FINISH: ZINC/ALUM ALLOY ENDBELLS, AUTOPHORETIC (BLACK) FRAME
 4. MOTOR DUTY: CONTINUOUS, 12 VOLTS, .03 HP, 4300 RPM
 5. SHAFT MATERIAL: 1144 STRESSPROOF STEEL
 6. .05 MAX END PLAY

UNLESS OTHERWISE SPECIFIED		FIRST USED:	 MINNESOTA ELECTRIC TECHNOLOGY WWW.METMOTORS.COM MANKATO, MN 56001 USA	
ALL DIM ARE IN INCHES. INTERPRET DIM AND TOL PER ASME Y14.5M-1994. DO NOT SCALE.	TOLERANCES ANGLE - ± 1° FRACTION - ± 1/64 DECIMAL: .x = ± .05 .xx = ± .01 .xxx = ± .005 .xxxx = +.0002/- .0003	JOB NO: 97-1760 MODEL NO: 3A-1203402C	DWG NO: 300-1001A-12	REV E v5
THIRD ANGLE PROJECTION		CREATED: donaldg 8/27/2008	TITLE OUTLINE	SIZE C
		SOURCE PRINT:		SHEET 1 / 1